



[Home](#)

[Fleck Control Products](#) ▾


[Fleck Valve Rebuilds](#)

[System Choices](#)

[Contact Us](#)

Fleck Model: 9500

Econominder Twin System

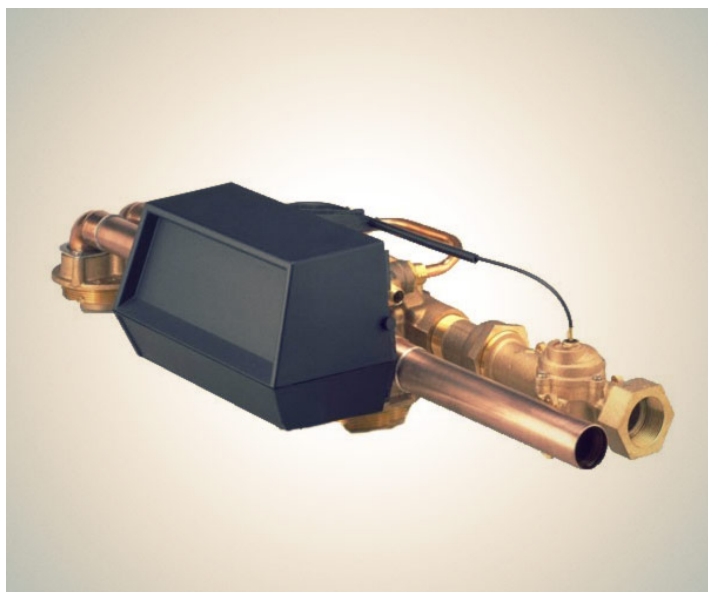

Valve Specifications

Valve Material	Lead Free Brass
Inlet/Outlet	1-1/2" NPT (Female)
Cycles*	5

Flow rates (50 PSI Inlet) - Valve Alone

Continuos (15PSI Drop)	43 gpm
Peak (25 PSI Drop)	55 gpm
CV**	9.8
Max.Backwash (25 PSI Drop)	16 gpm

Regeneration

Downflow/Upflow	Downflow
Adjustable	Yes
Time Available	82 or 164 minutes

[DOWNLOAD SERVICE MANUAL](#)



[Email](#)

customercare@fleckvalves.com to Order Now!



Features

- Ideal for 1-1/2" commercial systems requiring flow rates up to 48 gpm
- Easily adjustable 5-cycle downflow brining control
- Backwash capability handles up to 24" diameter tanks eliminating excessive, space wasting multiple tank installations
- Rugged long-life construction featuring lead free brass valve body
- Total flexibility in meter and timer setting
- Satisfies operational needs from 310 to 53,125 gallons
- Uses conditioned water for regeneration

Options

- Sediment, carbon or neutralizing filter
- Hot Water (150F)
- Electronic Timer
- Nickel Plating
- Sleeved to 1" meter
- Extended range meter

Meter Information

Meter Accuracy Range - 1-1/2"	1-1/2" 1.5-75 gpm
1-1/2" (LOW FLOW - SLEEVED TO 1")	1-1/2" (Low Flow Sleeved to 1") .7 - 40 gpm +/- 5%

Meter Capacity Range - 1-1/2"	Standard: 625 - 10,625 gals.
1-1/2" (Low Flow- Sleeved to 1")	Extended: 3,125 - 53,125 gals. Standard: 310 - 5,270 gals. Extended: 1,550 - 26,350 gals.

Dimensions

Distributor Pilot	1.5" Pipe I.D.
Drain Line	1" NPT (Male)
Brine Line	1/2" (3/8" available)}
Mounting Base	4"-8 UN
Height from top of tank	7-1/4"

Tank Application - can regenerate/backwash the following

Water Softener	10"-24" diameter
Iron Filter	N/A
Sediment, Carbon, and Neutralizing Filters	14" diameter

Additional Information

Electrical Rating	24v, 110v, 220v-50 Hz, 60 Hz
Pressure	Hydrostatic: 300 psi Working: 20 - 125 psi
Temperature	34° - 110° F

HELPFUL LINKS

[Find My Valve](#)

[System Choices](#)



customer@fleckvalves.com



Timers & Controls

Contact FleckValves

Email customer@fleckvalves.com or call 1-800-581-3488 to Order Now!

Copyright 2017 FleckValves.com | All Rights Reserved | Site Designed by 360 Ideas /// Sitemap

